

# Declaration of Conformity

In Accordance with ANSI/ISEA 125-2014



Alexander Andrew, Inc. 1306 S. Alameda St Compton, CA 90221

Declaration # C0817008a

Declaration Date 8.23.17

Tested Item # **8250** **23" Rebar Positioning Assembly, Chain**

Additional Items Conforming Under this Declaration:

82506L 825010LK

Alexander Andrew, Inc. declares that the product(s) listed above is in conformity with the requirements of the following performance standard(s):

**ANSI Z359.3-2017**

Conformity Assessment Method in accordance with ANSI/ISEA 125-2014

Level 1

Level 2

Level 3

**Level 1:** FallTech Lab  
Outside the Scope of  
ISO/IEC Standard 17025:2005

**Level 2:** FallTech Lab  
Within the Scope of  
ISO/IEC Standard 17025:2005

**Level 3:** Independent 3rd Party Lab  
accredited to  
ISO/IEC Standard 17025:2005

Supporting Documentation **PC-1266**

Authorized Signature

Name Martin Barila

Title VP of Operations

Date 2.2.18

Exova  
3883 East Eagle Drive  
Anaheim  
California  
USA  
92807

T: +1 (714) 630-3003  
F: +1 (714) 630-4443  
E: sales@exova.com  
W: www.exova.com



Testing. Advising. Assuring.

September 5, 2017

FallTech Testing Laboratory  
1306 S. Alameda Street  
Compton, CA 90221

Attention: Jay Sponholz  
Quality Manager

Subject: **Attestation of Witnessing Testing**  
**Exova OCM Job # 371174-13**  
**FallTech P.O.: OPEN**  
**Report No.: PC-1266**  
**Base Part No. 8250**  
**Description: 23" Rebar Positioning Assembly; Chain with Swivel Rebar Hook**

Dear Mr. Sponholz:

The purpose of this attestation is to attest to the fact that a representative of Exova OCM was on site at FallTech's facilities to confirm suitability of the equipment used, calibration status of the equipment and to witness testing performed by FallTech employees. Details of this visit are included below:

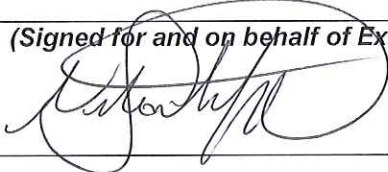

- Date of Testing:
  - August 22, 2017
- Exova OCM Test Witness:
  - 8/22/17 - Nolan Schatzle
- FallTech Test Operators:
  - Yesbet Sierra/Jay Sponholz
- Specification:


ANSI Z359.3-2017 Sections 4.2.1, 4.2.3

- Equipment Calibration Interval
  - 1 year, except weights which are 5 years

Attached to this attestation is the test report generated by FallTech Testing Laboratory. Exova OCM test witness certifies the report accurately presents the testing performed on the samples identified.

Test Report #	Date	Base Part #	Description	Sample ID's	Results
PC-1266	8/22/17	8250	23" Rebar Positioning Assembly; Chain with Swivel Rebar Hook	3828612 3828619 3828609 3828514 3828567 3828621	Pass

<b>Test Witness Signature:</b> Nolan Schatzle Technician Mechanical Laboratory	<i>(Signed for and on behalf of Exova-OCM)</i>  
---	--

<b>Approval Signature:</b> Victor Mendez Production Manager	<i>(Signed for and on behalf of Exova-OCM)</i> 
---	--

This attestation shall not be reproduced except in full, without the written approval of Exova-OCM. The laboratory has witnessed the testing the material / items supplied by the client as sampled by the client. The testing is not within Exova OCM's L.A.B scope of testing and was not performed at Exova OCM.



### FallTech Test Report

<b>Test Report No.</b>	PC-1266	<b>Rpt. Date</b>	8/23/2017	<b>Rpt. Rev</b>		<b>Rev Date</b>	
<b>Report Prepared For</b>	FallTech						
<b>Initiated By</b>	Sara Martinez	<b>Test Specification(s)</b>	ANSI Z359.3-2017, 4.2.1 & 4.2.3				
<b>Part No.</b>	8250	<b>Part No. Revision</b>	A				
<b>Part Description</b>	23" Rebar Positioning Assembly; Chain with Swivel Rebar Hook						
<b>Test Request No.</b>	PC-1266	<b>Date Complete</b>	8/22/2017				
<b>Test Operator(s)</b>	Yesbet Sierra / Jay Sponholz						

### Material/Sample Identification

Sample ID	Description
3828612	23" Rebar Positioning Assembly; Chain with Swivel Rebar Hook
3828619	23" Rebar Positioning Assembly; Chain with Swivel Rebar Hook
3828609	23" Rebar Positioning Assembly; Chain with Swivel Rebar Hook
3828514	23" Rebar Positioning Assembly; Chain with Swivel Rebar Hook
3828567	23" Rebar Positioning Assembly; Chain with Swivel Rebar Hook
3828621	23" Rebar Positioning Assembly; Chain with Swivel Rebar Hook

### Test Summary

Test Specification	Test Criteria		Test Result	Pass/Fail
ANSI Z359.3-2017 4.2.1	Static Strength	≥ 5000 Lbf	5044.4 Lbf.	Pass
	Hold	≥ 1 Minute	1 Minute	Pass
ANSI Z359.3-2017 4.2.1	Static Strength	≥ 5000 Lbf	5070.5 Lbf.	Pass
	Hold	≥ 1 Minute	1 Minute	Pass
ANSI Z359.3-2017 4.2.1	Static Strength	≥ 5000 Lbf	5042.9 Lbf.	Pass
	Hold	≥ 1 Minute	1 Minute	Pass



### FallTech Test Report


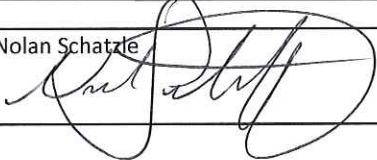
<b>Test Report No.</b>	PC-1266	<b>Rpt. Date</b>	8/23/2017	<b>Rpt. Rev</b>		<b>Rev Date</b>	
<b>Report Prepared For</b>	FallTech						
<b>Initiated By</b>	Sara Martinez	<b>Test Specification(s)</b>	ANSI Z359.3-2017, 4.2.1 & 4.2.3				
<b>Part No.</b>	8250		<b>Part No. Revision</b>	A			
<b>Part Description</b>	23" Rebar Positioning Assembly; Chain with Swivel Rebar Hook						
<b>Test Request No.</b>	PC-1266		<b>Date Complete</b>	8/22/2017			

ANSI Z359.3-2017 4.2.3	Dynamic Strength	Peak Impact Load ≥ 3,600 Lbf	6828.3 Lbf	Pass
	Hold	Remain Suspended for ≥ 1 Minutes	1 Minutes	Pass
ANSI Z359.3-2017 4.2.3	Dynamic Strength	Peak Impact Load ≥ 3,600 Lbf	6901.7 Lbf	Pass
	Hold	Remain Suspended for ≥ 1 Minutes	1 Minutes	Pass
ANSI Z359.3-2017 4.2.3	Dynamic Strength	Peak Impact Load ≥ 3,600 Lbf	5956.7 Lbf	Pass
	Hold	Remain Suspended for ≥ 1 Minutes	1 Minutes	Pass

#### Conclusion

FallTech P/N 8250 Rev. A meets the requirements of ANSI Z359.3-2017

#### Report Signatories and Approval

<b>Lab Quality Manager</b>		<b>Date</b>	8/23/2017
<b>Witnessed by</b>	Nolan Schatzle 	<b>Date</b>	9-5-17