


## A/S / Master Link

This is a standard master link, ideal for simple, speedy assembly of Single and Double Leg chain slings using the V/S Connex Connecting Links.

For Triple and Quad Leg slings it can only be used in conjunction with B/S TransitionLinks in G/S Quad Leg Assemblies. May also be used as a master link in welded systems. Also suitable as an end link.

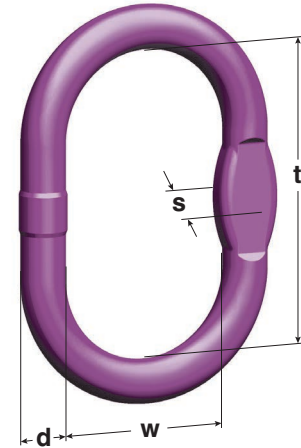

Code	Single leg sling	Double leg sling	WLL Safety 4 (90° - 45°) (lb)	WLL Safety 5 (90° - 45°) (lb)	Fits on single hook DIN 15401	Fits on double hook DIN 15402	d (inch)	t (inch)	w (inch)	s (inch)	Weight (lbs/pc)	Quantity per package
A/S 13	9/32"	-	5,800	5,800	2.5	4	0.51	4.33	2.36	0.39	0.75	12
A/S 16	5/16"	9/32"	7,500	7,500	2.5	4	0.63	4.33	2.36	0.55	1.17	12
A/S 18	3/8"	5/16"	10,000	10,000	5	6	0.77	5.31	2.95	0.55	2.03	12
A/S 22	1/2"	3/8"	16,700	16,700	6	8	0.91	6.30	3.54	0.67	3.53	8
A/S 26	5/8"	1/2"	26,000	26,000	8	10	1.06	7.09	3.93	0.79	5.42	4
A/S 32	3/4"	5/8"	39,100	36,600	10	12	1.30	7.87	4.33	1.02	9.13	2
A/S 36	7/8"	3/4"	61,100	55,500	16	20	1.42	10.24	5.51	1.14	13.71	2