


## G/S / Quad Leg Master Link Assembly

This standard master link assembly is ideal for preparing Triple and Quad Leg chain slings in assembled or welded systems. Consists of an A/S Master Link and two B/S Transition Links. A flattened section on the transition links open up additional, universal connection possibilities. For dimensions on the B/S Transitional Link, see page 8.

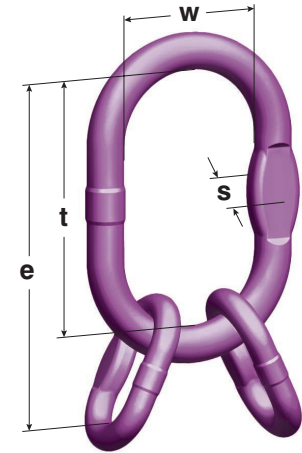

Code	Consisting of	WLL (90° - 60°) (lb)	WLL (60° - 45°) (lb)	Fits on single hook DIN 15401	Fits on double hook DIN 15402	e (inch)	t (inch)	w (inch)	s (inch)	Weight (lbs/pc)	Quantity per package
G/S 7/8	A/S 22 + 2 B/S 16	14,800	12,100	6	8	9.06	6.30	3.54	0.67	5.10	6
G/S 10	A/S 26 + 2 B/S 20	22,900	18,700	8	10	10.43	7.09	3.94	0.79	8.40	4
G/S 13	A/S 32 + 2 B/S 22	39,000	31,800	10	12	12.40	7.87	4.33	1.02	14.21	2
G/S 16	A/S 36 + 2 B/S 26	58,700	47,900	16	20	15.74	10.24	5.51	1.14	22.13	1
G/S 19/20	A/S 50 + 2 B/S 32	91,700	74,900	32	40	19.69	13.78	7.48	1.69	49.76	1