


WSB/S / Swivel Safety Hook

This hook is at its best when used with the Connex system. It closes and locks automatically and cannot be opened and **cannot be rotated while under load**. The large swivel casing opens up a wide range of application options and compared to the HS/S, the larger jaw opening allows for much more flexibility.

The WSB/S Swivel Safety Hook is suitable for **straight pull only**. Also note that the tip of the hook and the safety latch must not be placed under load and the hook should not be used in the welded system.

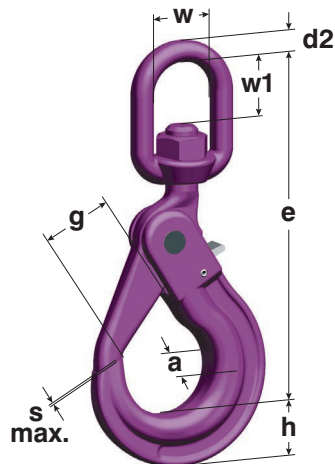

Code	Chain Size	WLL (lb)	e (inch)	h (inch)	a (inch)	w (inch)	w1 (inch)	d2 (inch)	g (inch)	s max. (inch)	Weight (lbs/pc)	Quantity per package
WSB/S 7/8	9/32" - 5/16"	5,700	7.17	1.02	0.79	1.38	1.42	0.47	1.34	0.04	3.39	6
WSB/S 10	3/8"	8,800	8.58	1.18	1.14	1.65	1.61	0.63	1.77	0.04	4.71	6
WSB/S 13	1/2"	15,000	10.59	1.57	1.38	1.93	1.85	0.79	2.05	0.06	9.72	2
WSB/S 16	5/8"	22,600	12.56	1.97	1.61	2.36	2.36	0.94	2.36	0.08	16.15	1