



“These pads made my job a lot easier and safer.”

Anthony Boyd
US ARMY CORPS OF ENGINEERS


PRODUCT DETAILS

- Extreme Rigidity
- Engineered Strength
- Best Rigidity & Strength to Weight Ratio
- Durability and Longevity
- Hi-Viz TuffGrip® Handles
- Waterproof and Chemical Resistant
- Industrial Grade Safety Texturing
- Recessed Handles for Easy Rolling

BEST FOR

- Mobile Cranes
- Hi-Lift Aerials
- Digger Derricks
- Concrete Pump Trucks

MODEL	W X L X H (in)	THICKNESS (in)	APPROX AREA (sq ft)	WEIGHT (lbs)	CRUSH RATING* (psi)	WORKING LOAD LIMIT* (lbs)
A FTR36-1	36 X 1	1 inch	7	75	600	130,000
B FTR42-1	42 X 1	1 inch	9.6	100	600	150,000
C FTR48-1	48 X 1	1 inch	12.5	130	600	170,000

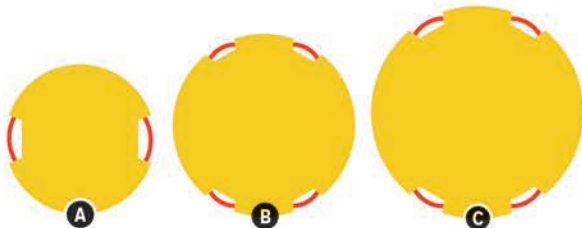

Crush Rating – The maximum allowable pressure. **Working Load Limit** – The maximum allowable load based on the application.

