

 FALLTECH®



**FT-X**®

**EDGECORE**™

LEADING EDGE

Patent Pending

Falltech® introduces the new, Patent Pending, 8' FT-X® EdgeCore™ Class 2 Leading Edge Self-retracting Lifeline series engineered for those who will not compromise on safety, compliance, worker comfort, and efficiency when working at height.

8' Class 2 Leading Edge

FT-X® EdgeCore



### Retractable Units

Compact design keeps retractable units close to the body's center line to reduce fatigue and positions away from the back to minimize discomfort from rubbing or pressure from resting



### Triple Action Connector

Proprietary aluminum alloy dorsal connector provides simplified push button attachment with visual locking indicators



### Compact, Extended Capacity Energy Absorber

420 lb. worker rated extended capacity energy absorber's low-profile shape reduces heat and sweat build up and is protected by an abrasion resistant cover



### Lightweight, Durable Housings

Engineered housing material provides durability and flexibility at low weight. Dark blue color distinguishes the below D-ring and leading edge capability of FT Class 2 SRLs




### EdgeCore™ Lifeline

Innovative lifeline design is not a webbing but a structure of multiple Kevlar® cables with UV-resistant Composite jacket providing ultimate strength and durability over leading edge hazards. EdgeCore is 40% lighter than most Class 2 Leading Edge SRLP cable lifelines



### Labels

Comprehensive fall clearance charts and tables included inside the energy absorber cover offer easily accessible reference contributing toward safety at all times

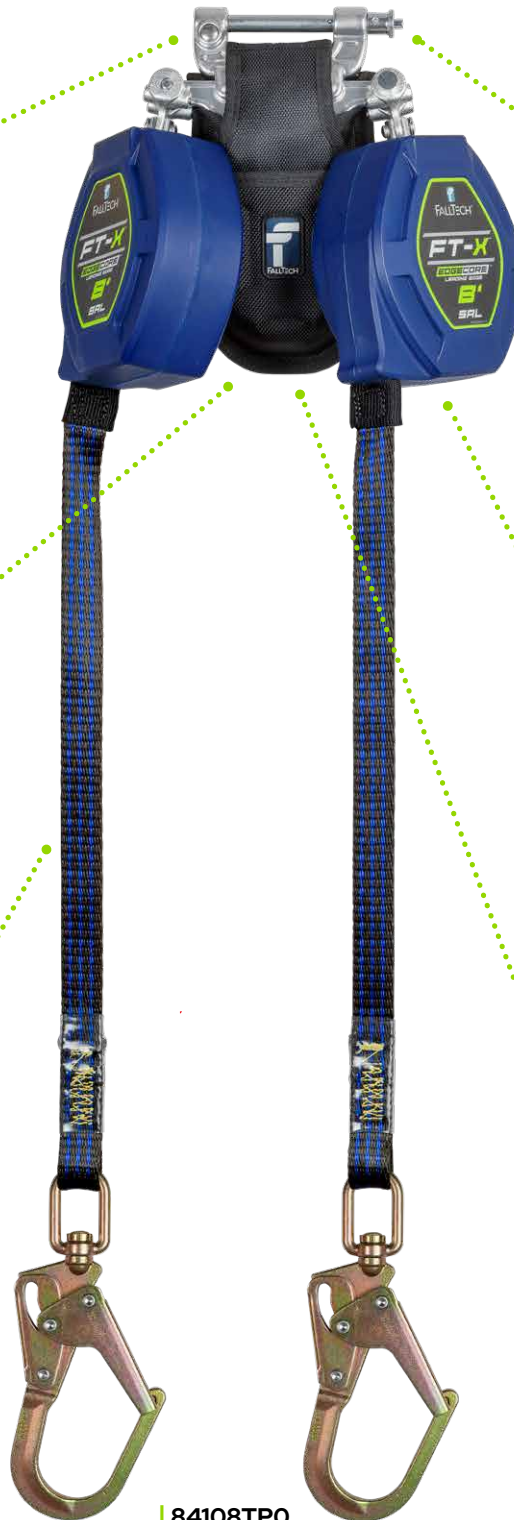

84108TPO  
Patent Pending

Falltech® introduces the new, Patent Pending, 8' FT-X® EdgeCore™ Class 2 Leading Edge Self-retracting Lifeline series engineered for those who will not compromise on safety, compliance, worker comfort, and efficiency when working at height.

8' Class 2 Leading Edge

FT-X® EdgeCore



### Ergonomic Comfort Design

Compact design elevates the SRD connection points to align optimally with worker motion to minimize fatigue and increase productivity




### Optimized Lock-up Speed

Internal mechanism design minimizes unintentional lockups to keep you moving freely with no interruption in productivity




### SpeedLink™ Field Replaceability

Industry first field replaceable Class 2 Leading Edge SRL-P provides overall lowest cost of ownership and less equipment downtime. For twin FT-X SRLs the retractable unit with damaged lifeline or inspection failure can be immediately replaced on site easily and safely thanks to the simple SpeedLink™ mechanism and visual locking indicators




### ANSI Z359.14-2021 Class 2 Compliant

Suitable for below D-ring tie-off up to five feet and leading edge exposures and hazards, including steel and precast concrete

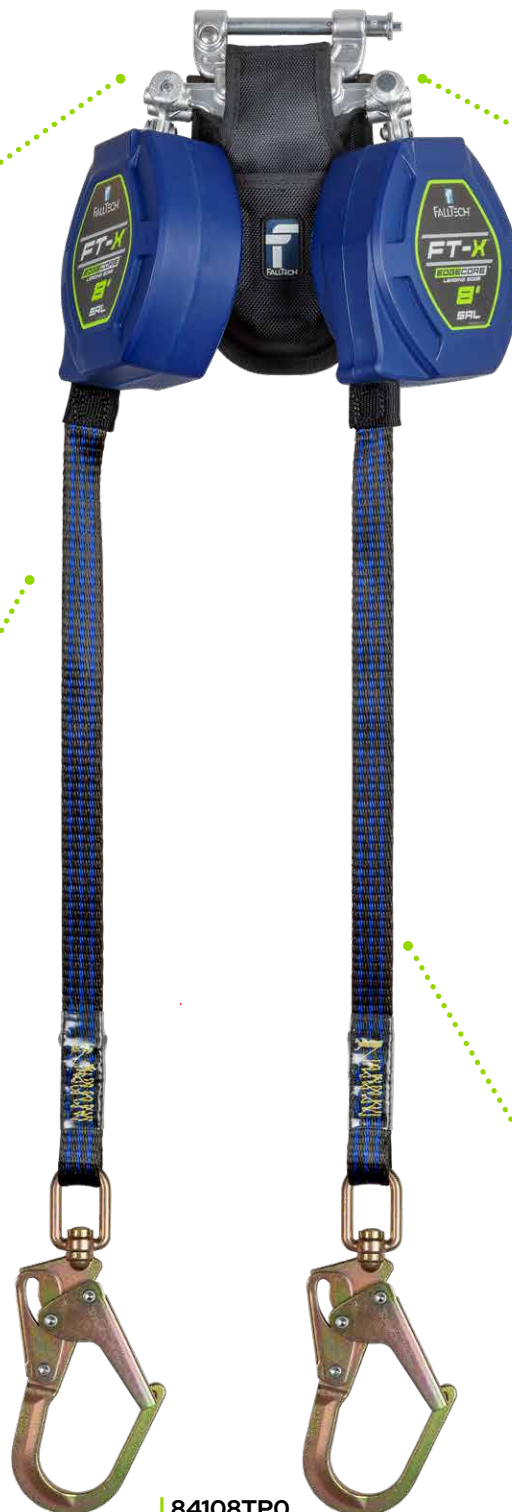

84108TPO  
Patent Pending

Falltech® introduces the new, Patent Pending, 8' FT-X® EdgeCore™ Class 2 Leading Edge Self-retracting Lifeline series engineered for those who will not compromise on safety, compliance, worker comfort, and efficiency when working at height.

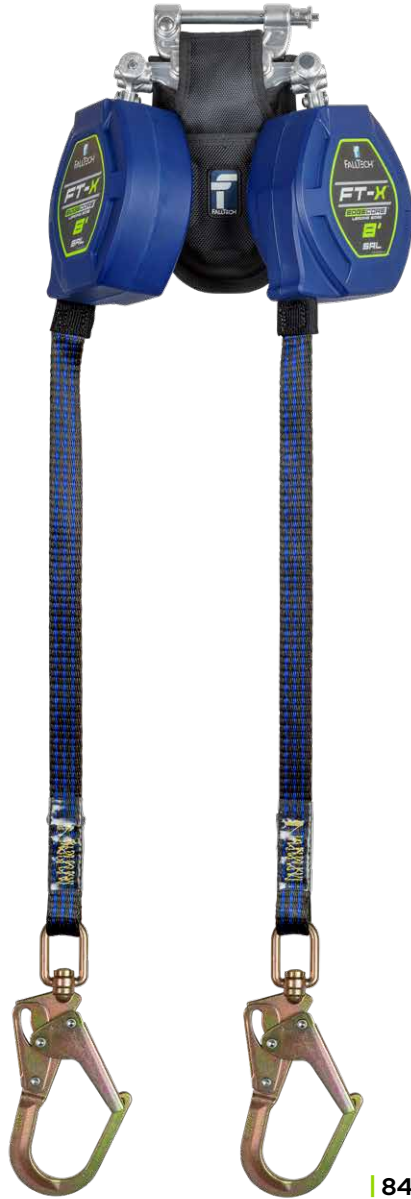

84108TPO



84108SPO



Steel Swivel Mini Rebar Hook



Steel Swivel Snap Hook



Steel Swivel Rebar Hook



Aluminum Rebar Hook



Aluminum Carabiner

Part #	Single or Twin	Leg-end Connector
84108SP0	Single	Steel Swivel Mini Rebar Hook
84108SP1	Single	Steel Swivel Snap Hook
84108SP3	Single	Steel Swivel Rebar Hook
84108SP5	Single	Aluminum Rebar Hook
84108SP6	Single	Aluminum Captive Eye Carabiner
84108TP0	Twin	Steel Swivel Mini Rebar Hook
84108TP1	Twin	Steel Swivel Snap Hook
84108TP3	Twin	Steel Swivel Rebar Hook
84108TP5	Twin	Aluminum Rebar Hook
84108TP6	Twin	Aluminum Captive Eye Carabiner
84108RP0	Replacement	Steel Swivel Mini Rebar Hook
84108RP1	Replacement	Steel Swivel Snap Hook
84108RP3	Replacement	Steel Swivel Rebar Hook
84108RP5	Replacement	Aluminum Rebar Hook
84108RP6	Replacement	Aluminum Captive Eye Carabiner

Performance Specifications	
ANSI SRL Class/Type	Class 2 SRL
Maximum Arrest Force	1,800 lb
Average Arrest Force	1,575 lb or less
Maximum Arrest Distance	42 in or less
Static Strength	3,600 lbs Minimum
ANSI User Capacity	One User up to 310 lbs. Max
OSHA User Capacity	One User up to 420 lbs. Max

Material Specifications	
Housing	Nylon
Lifeline	EdgeCore™ strength (Kevlar®/Composite) Min. 5,000 lbs.
Leg-ed Connector	Variable 5,000 lb min. strength with 3,600 lb min. gate strength
Dorsal Connector	Aluminum Alloy 5,000 lb min. strength
Relevant Standards	
ANSI	ANSI Z359.14-2021 Class 2
OSHA	1926.502, 1910.140



Discover the full selection of all  
our fall protection products at  
[www.FallTech.com](http://www.FallTech.com)



Tel / 323.752.0066

Fax / 323.752.5613

©2025 Alexander Andrew, Inc  
1306 S. Alameda St. Compton,  
CA. 90221-4803

Tools shown not included.

Product description and specifications  
herein may change without notice.

U.S. and International Patents Pending.

