







- HOISTEK™ Hoists meets or exceeds all hoist standards
- All steel construction for external impact resistance
- High-strength, cold-formed, stamped steel construction makes it lighter in weight yet impact-resistant for longer life
- 360° degree handle rotation with short stroke to ratchet loads
- Durable baked enamel paint protection
- Reliable non-asbestos disc brake

IMPROVED FEATURES:

- Ribbed lever handle
- Easily Removable Top Hook
- Minimal effort in a compact design
- Chain guides provide smooth chain operation
- Single-hand "free chaining" is simple and convenient, allowing smooth, trouble-free operation in the vertical or horizontal position
- Hardened steel rollers supporting the load sheaves run smoother and last longer than bearings
- Every lever hoist is operationally tested to 150% of the rated capacity and is issued with an individual test certificate












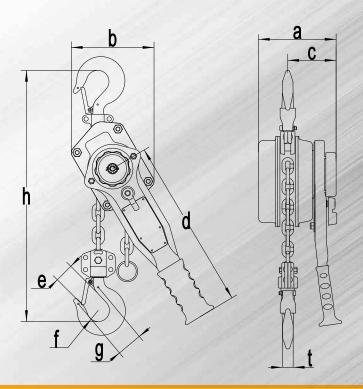

HOISTEK™ HLH SERIES LEVER HOISTS					
Product Number			HLH-010	HLH-015	HLH-030
Capacity		(ton)	1	1.5	3
Number of Falls			1	1	1
Capacity		(lbs)	2,200	3,300	6,600
Capacity Test Load		(lbs)	3,300	4,950	9,900
Capacity Test Load		(ton)	1.50	2.25	4.50
Load Chain		(mm)	6x18	8x24	10x30
Standard Lift		(ft)	5	5	5
Height	h	(in)	12.8	15.6	19.7
Length	а	(in)	5.9	7.0	7.6
Width	b	(in)	3.8	4.3	5.7
Net Weight		(lbs)	14.1	24.9	42.5
Gross Weight		(lbs)	15.0	27.1	44.9
Pull to Rated Load		(N)	360	380	315
Dimensions	а	(in)	5.9	7.0	7.6
	b	(in)	5.3	6.5	8.3
	С	(in)	3.5	4.0	4.2
	d	(in)	10.9	11.5	13.4
	е	(in)	1.3	1.3	1.7
	f	(in)	1.3	1.6	2.0
	g	(in)	1.5	1.9	2.5
	h	(in)	12.8	15.6	19.7
	t	(in)	0.6	0.7	1.1



