


ADJUSTABLE SPREAD TELESCOPING BEAMS

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Spreader Beams shipped with proof load certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Standard with swivel latch hooks. Top rigging not included - please call for pricing
- Made in U.S.A.
- Custom designs available - call for engineering.

- Minimum horizontal top rigging angle of 45°.
- Ideally suited for adding stability to critical lifts.

Prop 65 – See Page 112

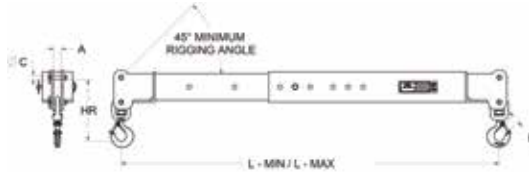

| TELESCOPING ADJUSTABLE SPREADER BEAMS | | | | | | | |
|---------------------------------------|---|-----------------------------|-------------------|-------------------|--------------------|--------------------|----------------------------|
| Working Load Limit in Pounds* | Model Number Headroom (in) Weight (lbs) | Outside Spread (L) in Feet* | | | | | A (in) C (in) E (in) |
| | | Min Max 4 - 6 | Min Max 6 - 10 | Min Max 8 - 14 | Min Max 12 - 20 | Min Max 21 - 30 | |
| 4,000 | Part Number | 12805 | 12822 | 12813 | 12829 | 24455 | 1.00 |
| | HR = | 5.37 | 5.12 | 5.12 | 5.12 | 8.87 | 0.50 |
| | LBS = | 80 | 120 | 155 | 235 | 585 | 0.89 |
| 10,000 | Part Number | 12834 | 12842 | 12848 | 12853 | 24454 | 1.25 |
| | HR = | 6.53 | 6.28 | 6.28 | 6.28 | 11.0 | 0.75 |
| | LBS = | 130 | 190 | 250 | 365 | 802 | 1.08 |
| 20,000 | Part Number | 12864 | 12872 | 12880 | 12885 | 24453 | 1.66 |
| | HR = | 7.63 | 7.63 | 7.63 | 7.63 | 13.0 | 1.00 |
| | LBS = | 185 | 265 | 345 | 510 | 1160 | 1.31 |

| OPTIONAL TOP RIGGING | | | | | | |
|-------------------------------|----------------------------|--------------|--------------|--------------|--------------|--------------|
| Working Load Limit in Pounds* | Part Name | Part Number | Part Number | Part Number | Part Number | Part Number |
| 4,000 | Adjustable Spreader | 12805 | 12822 | 12813 | 12829 | 24455 |
| | Chain | 23354 | 23355 | 23356 | 23357 | 24456 |
| | Wire Rope | 23396 | 23397 | 23398 | 23399 | 24462 |
| | Round Sling Bridle | 23374 | 23375 | 23376 | 23377 | 24459 |
| 10,000 | Adjustable Spreader | 12834 | 12842 | 12848 | 12853 | 24454 |
| | Chain | 23378 | 23379 | 23380 | 23381 | 24457 |
| | Wire Rope | 23400 | 23401 | 23402 | 23403 | 24463 |
| | Round Sling Bridle | 23382 | 23383 | 23384 | 23385 | 24460 |
| 20,000 | Adjustable Spreader | 12864 | 12872 | 12880 | 12885 | 24453 |
| | Chain | 23386 | 23387 | 23388 | 23389 | 24458 |
| | Wire Rope | 23404 | 23405 | 23406 | 23407 | 24464 |
| | Round Sling Bridle | 23390 | 23391 | 23392 | 23393 | 24461 |

*Minimum horizontal top rigging angle is 45° on all fixed and adjustable spreaders. M&W recommends a minimum horizontal top rigging angle of 60°. Adjustable on 1" increments.