


LIFTING HOOKS

Alloy Steel Foundry Hooks

LIFTING HOOKS : ALLOY STEEL FOUNDRY HOOKS

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Corrosion resistant finish.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Tapered tip.
- Available in long and short reach.
- **Maximum use temperature is 400° F.**
- $\pm 4\%$ on dimensions.
- Custom designs available - call for engineering.
- All eyes welded unless otherwise specified.

 Prop 65 – See Page 112

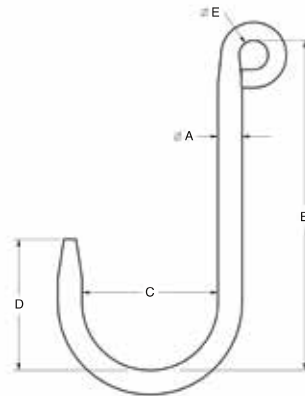

Material ØA in Inches*	Part Number	Long Reach Foundry Hooks					Working Load Limit in Pounds*	Weight LBS
		A	B	C	D	E		
1/2	14601	0.50	6.00	2.50	2.31	0.75	500	.90
5/8	14602	0.62	8.50	3.50	3.38	0.75	800	1.4
3/4	14603	0.75	8.50	3.50	3.38	0.75	1,250	2.0
13/16	14604	0.81	8.50	3.50	3.25	0.88	1,600	2.5
1	14605	1.00	8.50	4.00	3.75	1.00	2,500	4.0

*Larger capacities and custom configurations available. Please call for ordering assistance.

Material ØA in Inches*	Part Number	Short Reach Foundry Hooks					Working Load Limit in Pounds*	Weight LBS
		A	B	C	D	E		
1/2	14782	0.50	6.00	3.00	3.00	0.75	450	.90
5/8	14783	0.62	6.00	3.00	3.00	0.75	900	1.4
3/4	14784	0.75	6.00	3.00	3.00	0.75	1,400	2.0
13/16	14785	0.81	6.00	3.00	3.00	0.88	2,000	2.5
1	14786	1.00	6.00	3.00	3.00	1.00	3,000	4.0

*Larger capacities and custom configurations available. Please call for ordering assistance.