

## LIFTING HOOKS

Alloy Steel J-Hooks


Eye Style A



### LIFTING HOOKS : ALLOY STEEL J-HOOKS EYE STYLE A

- ±4% on dimensions.
- Custom designs available - call for engineering.
- **All eyes welded unless otherwise specified.**
- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Corrosion resistant finish.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- **Maximum use temperature is 400° F.**

Prop 65 – See Page 112

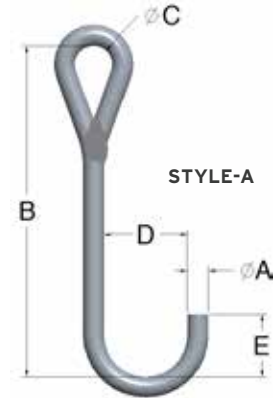

Material ØA in Inches*	Part Number C = D = E =	Standard Alloy Style A Steel J-Hooks - B (length)							
		5"	6"	7"	8"	9"	10"	12"	14"
Ø 1/4" WLL = 100 Pounds	<b>Part Number</b>	<b>11621-5</b>	<b>11621-6</b>	<b>11621-7</b>	<b>11621-8</b>	<b>11621-9</b>	<b>11621-10</b>	<b>11621-12</b>	<b>11621-14</b>
	C =	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	D =	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25
	E =	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
	<b>WEIGHT</b>	0.14	0.9	0.9	0.9	0.9	1	1	1
Ø 5/16" WLL = 250 Pounds	<b>Part Number</b>	<b>11622-5</b>	<b>11622-6</b>	<b>11622-7</b>	<b>11622-8</b>	<b>11622-9</b>	<b>11622-10</b>	<b>11622-12</b>	<b>11622-14</b>
	C =	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	D =	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25
	E =	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
	<b>WEIGHT</b>	0.21	0.9	0.9	0.9	0.9	1	1	1
Ø 3/8" WLL = 365 Pounds	<b>Part Number</b>	<b>11623-5</b>	<b>11623-6</b>	<b>11623-7</b>	<b>11623-8</b>	<b>11623-9</b>	<b>11623-10</b>	<b>11623-12</b>	<b>11623-14</b>
	C =	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	D =	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
	E =	1.12	1.12	1.12	1.12	1.12	1.12	1.12	1.12
	<b>WEIGHT</b>	1.1	0.37	1.1	1.1	1.1	1.3	1.3	1.3
Ø 1/2" WLL = 650 Pounds	<b>Part Number</b>	<b>11624-5</b>	<b>11624-6</b>	<b>11624-7</b>	<b>11624-8</b>	<b>11624-9</b>	<b>11624-10</b>	<b>11624-12</b>	<b>11624-14</b>
	C =	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	D =	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
	E =	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
	<b>WEIGHT</b>	1.5	1.5	1.5	0.83	1.6	1.7	1.7	1.8
Ø 5/8" WLL = 1,000 Pounds	<b>Part Number</b>	<b>11625-5</b>	<b>11625-6</b>	<b>11625-7</b>	<b>11625-8</b>	<b>11625-9</b>	<b>11625-10</b>	<b>11625-12</b>	<b>11625-14</b>
	C =	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	D =	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50
	E =	1.87	1.87	1.87	1.87	1.87	1.87	1.87	1.87
	<b>WEIGHT</b>	1.9	1.9	1.9	2	1.5	2	2.1	2.2
Ø 3/4" WLL = 1,450 Pounds	<b>Part Number</b>		<b>11626-6</b>	<b>11626-7</b>	<b>11626-8</b>	<b>11626-9</b>	<b>11626-10</b>	<b>11626-12</b>	<b>11626-14</b>
	C =		1.00	1.00	1.00	1.00	1.00	1.00	1.00
	D =		3.00	3.00	3.00	3.00	3.00	3.00	3.00
	E =		2.25	2.25	2.25	2.25	2.25	2.25	2.25
	<b>WEIGHT</b>		2.3	2.3	2.3	2.4	2.34	2.5	2.6
Ø 7/8" WLL = 1,900 Pounds	<b>Part Number</b>				<b>11627-8</b>	<b>11627-9</b>	<b>11627-10</b>	<b>11627-12</b>	<b>11627-14</b>
	C =				1.00	1.00	1.00	1.00	1.00
	D =				3.50	3.50	3.50	3.50	3.50
	E =				2.62	2.62	2.62	2.62	2.62
	<b>WEIGHT</b>				2.7	2.8	2.9	3.8	3.2
Ø 1" WLL = 2,600 Pounds	<b>Part Number</b>						<b>11628-10</b>	<b>11628-12</b>	<b>11628-14</b>
	C =						1.25	1.25	1.25
	D =						4.00	4.00	4.00
	E =						3.00	3.00	3.00
	<b>WEIGHT</b>						3	3.3	5.75

\*Larger capacities and custom configurations available. Please call for ordering assistance.