


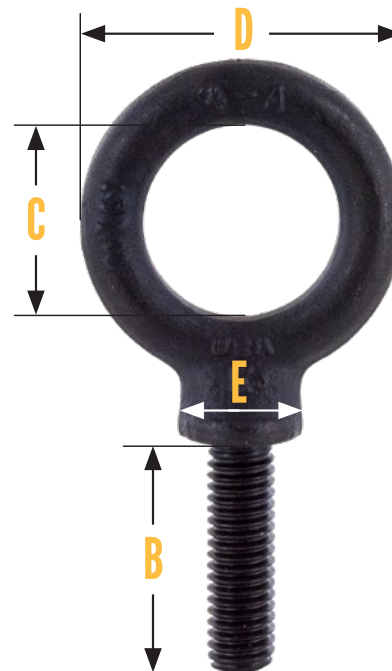

- Material: c1030
- Finish: Black Oxide
- Heat Treat: Quench & Draw
- **Caution:** Rated capacity is for straight lifts. Angle lifts should be avoided. Load limits are reduced by 75% on angle lifts. The shoulder must be mounted flush to lifting surface.

SKU	VENDOR#	WLL (lbs)	THREAD SIZE	B	C	D	E	WEIGHT (lbs)
GVSEB116X114-BO-AC	AK41405	1,300	3/8" - 16	1-1/4"	1"	1-21/32"	11/16"	0.20
GVSEB78X112-BO-AC	AK41409	2,400	1/2" - 13	1-1/2"	1-3/16"	2-1/16"	7/8"	0.40
GVSEB116X134-BO-AC	AK41413	4,000	5/8" - 11	1-3/4"	1-3/8"	2-1/2"	1-1/16"	.70
GVSEB114X2-BO-AC	AK41415	5,000	3/4" - 10	2"	1-1/2"	2-13/16"	1-1/4"	1.00
GVSEB1716X214-BO-AC	AK41417	7,000	7/8" - 9	2-1/4"	1-11/16"	3-1/4"	1-7/16"	1.60
GVSEB1916X212-BO-AC	AK41419	9,000	1" - 8	2-1/2"	1-13/16"	3-9/16"	1-9/16"	2.40
GVSEB11116X234-BO-AC	AK41421	12,000	1 1/8" - 7	2-3/4"	2"	4"	1-11/16"	3.50
GVSEB178X3-BO-AC	AK41423	15,000	1 1/4" - 7	3"	2-3/16"	4-7/16"	1-7/8"	5.00
GVSEB212X334-BO-AC	AK41431	28,000	1 3/4" - 5	3-3/4"	2-7/8"	6-1/16"	2-1/2"	12.00
GVSEB278X4-BO-AC	AK41433	38,000	2" - 4 1/2	4"	3-1/4"	6-7/8"	2-7/8"	16.50