


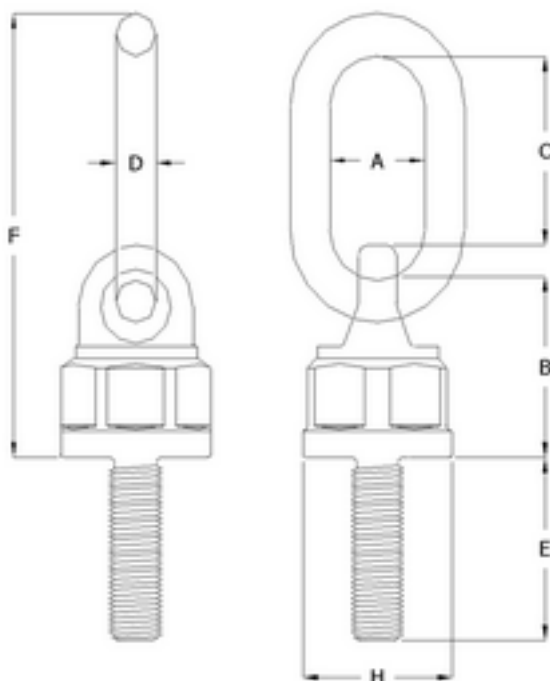

- Swivel Angle 360°
- Pivot Angle 180°
- Safety Factor: 4:1
- Material: Alloy Steel
- 200% Proof-Load Tested with Serial Number for Traceability
- Magnetic Particle Inspected
- Certified Heat Treatment
- Rated at 100% From 0° - 90°
- Meets or exceeds EN1677-4 requirements

SKU	VENDOR#	RATED LOAD (kg)	THREAD SIZE	A	B	C	D	E	F	H	WEIGHT (lbs)
ULR-8-125-12-AC	AK44302	400	M8 1.25	1-1/16"	1-1/2"	1-17/32"	5/16"	12 mm	3.66"	1.42"	0.6
ULR-10-150-19-AC	AK44304	500	M10 X 1.50	1-1/16"	1-1/2"	1-17/32"	5/16"	19 mm	3.66"	1.42"	0.6
ULR-12-175-20-AC	AK44310	1,050	M12 X 1.75	1-3/8"	2-1/2"	2-1/4"	1/2"	20 mm	5.83"	2.36"	2.6
ULR-14-2-31-AC	AK44312	1,150	M14 X 2.00	1-3/8"	2-1/2"	2-1/4"	1/2"	31 mm	5.83"	2.36"	2.6
ULR-16-2-31-AC	AK44314	1,900	M16 x 2.00	1-3/8"	2-1/2"	2-1/4"	1/2"	31 mm	5.83"	2.36"	2.7
ULR-20-250-38-AC	AK44320	2,150	M20 x 2.50	1-1/2"	3"	2-3/4"	3/4"	38 mm	7.20"	2.75"	5.5
ULR-22-250-38-AC	AK44322	2,250	M22 x 2.50	1-1/2"	3"	2-3/4"	3/4"	38 mm	7.20"	2.75"	5
ULR-24-3-38-AC	AK44324	4,200	M24 x 3.00	1-1/2"	3"	2-3/4"	3/4"	38 mm	7.20"	2.75"	5
ULR-30-350-50-AC	AK44346	5,000	M30 x 3.50	2"	3-43/64"	3-55/64"	7/8"	50 mm	9.1"	3.15"	9
ULR-33-350-50-AC	AK44348	7,000	M33 x 3.50	2"	3-43/64"	3-55/64"	7/8"	50 mm	9.1"	3.15"	8.5
ULR-36-4-54-AC	AK44350	8,000	M36 x 4.00	2"	3-43/64"	3-55/64"	7/8"	54 mm	9.1"	3.15"	9
ULR-39-4-58-AC	AK44355	8,000	M39 x 4.00	2"	3-43/64"	3-55/64"	7/8"	58 mm	9.1"	3.15"	9
ULR-42-450-63-AC	AK44360	10,000	M42 x 4.50	2-1/2"	4"	4-1/4"	1"	63 mm	10.1"	3.66"	13
ULR-42-450-152-AC	AK44362	10,000	M42 x 4.50	2-1/2"	4"	4-1/4"	1"	152 mm	10.1"	3.66"	15
ULR-42-450-304-AC	AK44363	10,000	M42 x 4.50	2-1/2"	4"	4-1/4"	1"	304 mm	10.1"	3.66"	18
ULR-45-450-68-AC	AK44367	10,000	M45 x 4.50	2-1/2"	4"	4-1/4"	1"	68 mm	10.1"	3.66"	13
ULR-48-5-68-AC	AK44365	10,000	M48 x 5.00	2-1/2"	4"	4-1/4"	1"	68 mm	10.1"	3.66"	13.5
ULR-48-5-152-AC	AK44366	10,000	M48 x 5.00	2-1/2"	4"	4-1/4"	1"	152 mm	10.1"	3.66"	16
ULR-48-5-304-AC	AK44364	10,000	M48 x 5.00	2-1/2"	4"	4-1/4"	1"	304 mm	10.1"	3.66"	20
ULR-56-550-84-AC	AK44370	15,000	M56 x 5.50	2-53/64"	5-11/64"	4-27/32"	1-1/4"	84 mm	12.29"	4.13"	22.5
ULR-56-550-203-AC	AK44376	15,000	M56 x 5.50	2-53/64"	5-11/64"	4-27/32"	1-1/4"	203 mm	12.29"	4.13"	27
ULR-56-550-304-AC	AK44384	15,000	M56 x 5.50	2-53/64"	5-11/64"	4-27/32"	1-1/4"	304 mm	12.29"	4.13"	30.5
ULR-60-550-90-AC	AK44372	15,000	M60 x 5.50	2-53/64"	5-11/64"	4-27/32"	1-1/4"	90 mm	12.29"	4.13"	23
ULR-60-550-203-AC	AK44378	15,000	M60 x 5.50	2-53/64"	5-11/64"	4-27/32"	1-1/4"	203 mm	12.29"	4.13"	28
ULR-60-550-304-AC	AK44386	15,000	M60 x 5.50	2-53/64"	5-11/64"	4-27/32"	1-1/4"	304 mm	12.29"	4.13"	32
ULR-64-6-95-AC	AK44375	15,000	M64 x 6.00	2-53/64"	5-11/64"	4-27/32"	1-1/4"	95 mm	12.29"	4.13"	24
ULR-64-6-203-AC	AK44380	15,000	M64 x 6.00	2-53/64"	5-11/64"	4-27/32"	1-1/4"	203 mm	12.29"	4.13"	29
ULR-64-6-304-AC	AK44388	15,000	M64 x 6.00	2-53/64"	5-11/64"	4-27/32"	1-1/4"	304 mm	12.29"	4.13"	34