


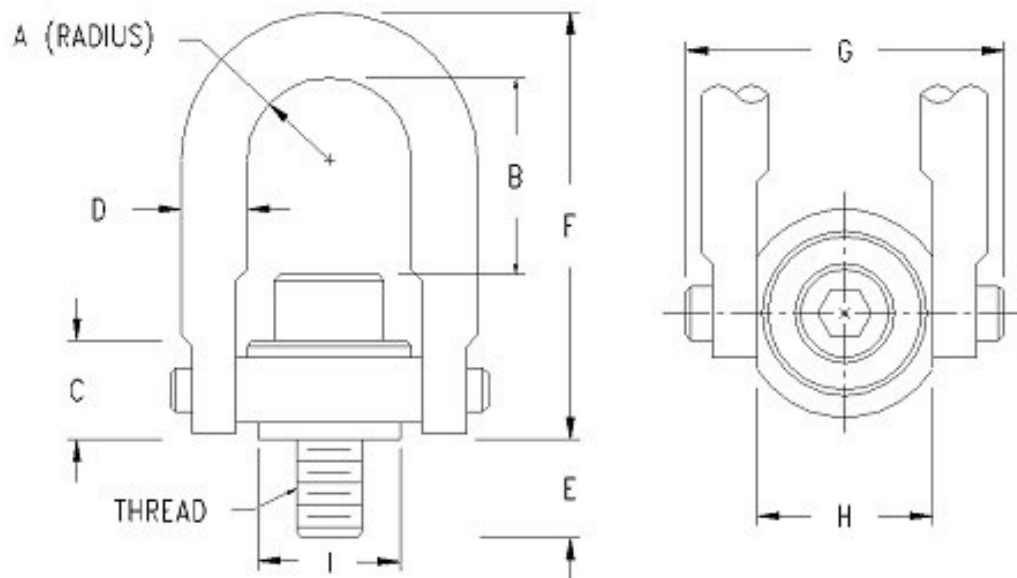

- Swivel Angel 360°
- Pivot Angle 180°
- Safety Factor: 5:1
- Material: Alloy Steel
- Finish: Black Oxide
- 200% Proof-Load Tested with Serial Number for Traceability
- Magnetic Particle Inspected
- Certified Heat Treatment
- Rated at 100% from 0° - 90°
- Meets or exceeds ASME B30.26 requirements

SKU	VENDOR#	RATED LOAD (lbs)	THREAD SIZE	A	B	C	D	E	F	G	H	I	TORQUE (ft-lbs)	WEIGHT (lbs)	SCREW
SWHR-58-11-34-AC	AK46002	4,000	5/8" - 11	.92"	2.33"	1.23"	3/4"	0.78"	4.93"	3.66"	1.98"	1.45"	60	2.5	46056
SWHR-58-11-112-AS	AK46005	4,000	5/8" - 11	.92"	2.33"	1.23"	3/4"	1.53"	4.93"	3.66"	1.98"	1.45"	60	2.6	46045
SWHR-12-13-34-AC	AK46008	2,500	1/2" - 13	.92"	2.46"	1.23"	3/4"	0.78"	4.93"	3.66"	1.98"	1.45"	28	2.5	46048
SWHR-12-13-114-AC	AK46012	2,500	1/2" - 13	.92"	2.46"	1.23"	3/4"	1.28"	4.93"	3.66"	1.98"	1.45"	28	2.5	46052
SWHR-34-10-1-AC	AK46014	5,000	3/4" - 10	.92"	2.21"	1.23"	3/4"	1.03"	4.93"	3.66"	1.98"	1.45"	100	2.6	46054
SWHR-34-10-112-AC	AK46018	5,000	3/4" - 10	.92"	2.21"	1.23"	3/4"	1.53"	4.93"	3.66"	1.98"	1.45"	100	2.7	46058
SWHR-516-18-12-AC	AK46104	800	5/16" - 18	.47"	1.32"	0.71"	3/8"	0.54"	2.72"	1.91"	1"	0.85"	7	0.36	46144
SWHR-38-16-12-AC	AK46106	1,000	3/8" - 16	.47"	1.26"	0.71"	3/8"	0.54"	2.72"	1.91"	1"	0.85"	12	0.37	46146
SWHR-78-9-1-AC	AK46202	8,000	7/8" - 9	1.41"	3.02"	1.71"	1"	1.04"	6.60"	5.16"	2.99"	2.20"	160	7	46242
SWHR-34-10-1-7-AC	AK46204	7,000	3/4" - 10	1.41"	3.14"	1.71"	1"	1.04"	6.60"	5.16"	2.99"	2.20"	100	7	46244
SWHR-78-9-112-AC	AK46205	8,000	7/8" - 9	1.41"	3.02"	1.71"	1"	1.54"	6.60"	5.16"	2.99"	2.20"	160	7	46270
SWHR-34-10-112-7-AC	AK46206	7,000	3/4" - 10	1.41"	3.14"	1.71"	1"	1.54"	6.60"	5.16"	2.99"	2.20"	100	7	46246
SWHR-1-8-114-AC	AK46210	10,000	1" - 8	1.41"	2.89"	1.71"	1"	1.29"	6.60"	5.16"	2.99"	2.20"	230	7	46250