


- Torque: No torque wrench required. Just spin the base down flush and tap one of the lugs to tighten.
- Swivel Angle: 360°
- Pivot Angle: 180°
- Safety Factor: 5:1
- Material: Alloy Steel
- Finish: Black Oxide
- 200% Proof-Load Tested with Serial Number for Traceability
- Magnetic Particle Inspected
- Certified Heat Treatment
- Rated at 100% From 0° - 90°
- Meets or exceeds ASME B30.26 requirements

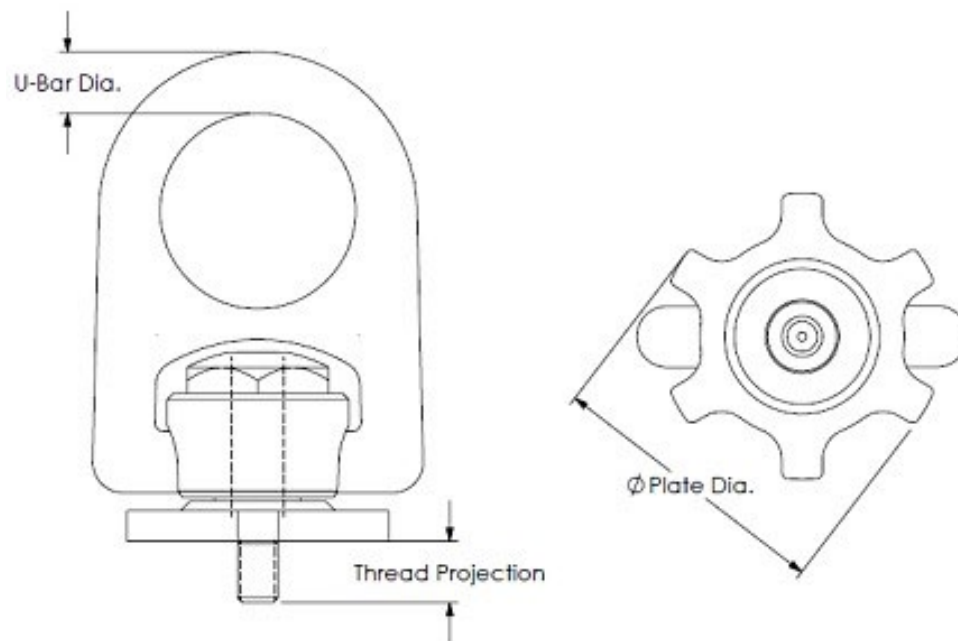

SKU	VENDOR#	RATED LOAD (lbs)	THREAD SIZE	THREAD PROJECTION	U-BAR DIA.	PLATE DIA.	WEIGHT (lbs)
SBHR-12-13-E34-AC	AK42002	2,500	1/2"-13	3/4"	3/4"	3 1/2"	4.32
SBHR-58-11-E1-AC	AK42004	4,000	5/8"-11	1"	3/4"	3 1/2"	6
SBHR-34-10-E1-AC	AK42006	5,000	3/4"-10	1"	3/4"	3 1/2"	4.5
SBHR-34-10-E112-AC	AK42202	7,000	3/4"-10	1-1/2"	1"	5 1/2"	11
SBHR-78-9-E112-AC	AK42204	8,000	7/8"-9	1-1/2"	1"	5 1/2"	11
SBHR-1-8-E112-AC	AK42206	10,000	1"-8	1-1/2"	1"	5 1/2"	11
SBHR-1-147-E2-AC	AK42802	15,000	1-1/4"-7	2"	1-1/4"	7"	22.55
SBHR-1-386-13-E2-AC	AK42704	20,000	1-3/8"-6	2"	1-1/4"	7"	23
SBHR-1-126-E314-AC	AK42404	20,000	1-1/2"-6	3-1/4"	1-1/4"	7"	23.7
SBHR-2-412-E314-AC	AK42400	20,000	2"-4 1/2	3-1/4"	1-1/4"	7"	24