


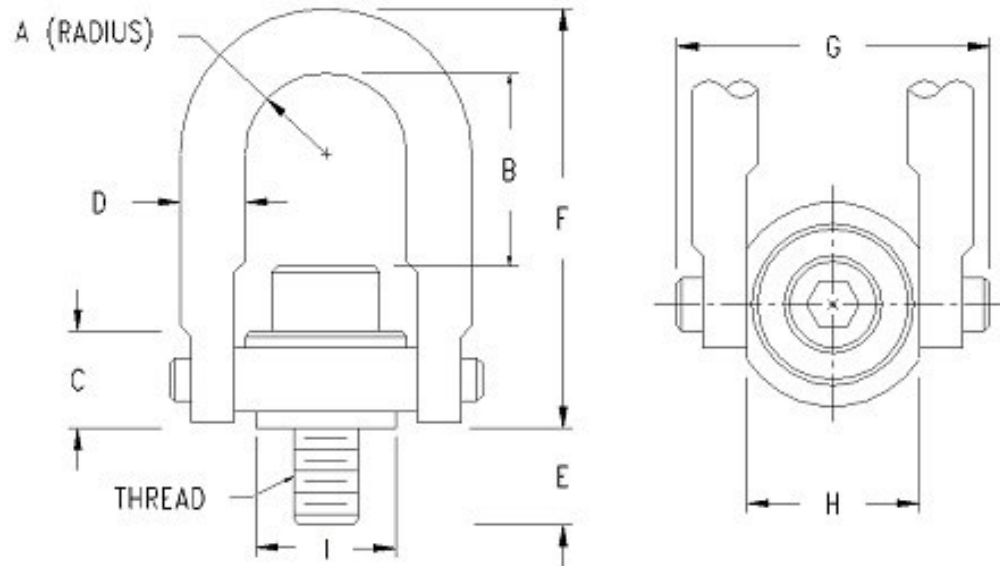

- Swivel Angle 360°
- Pivot Angle 180°
- Material: 316 Stainless Steel
- Liquid Penetrant Inspected
- 200% Proof-Load Tested with Serial Number for Traceability
- Rated at 100% From 0° - 90°
- Meets or exceeds ASME B30.26 requirements

SKU	VENDOR#	RATED LOAD (lbs)	THREAD SIZE	A	B	C	D	E	F	G	H	I	TORQUE (ft-lbs)	WEIGHT (lbs)	SCREW
SSHR-516-18-12-4-AC	AK58104	400	5/16" - 18	0.47"	1.32"	0.71"	3/8"	0.54"	2.72"	1.91"	1"	0.85"	3.5	0.35	58144
SSHR-38-16-12-5-AC	AK58106	500	3/8" - 16	0.47"	1.26"	0.71"	3/8"	0.54"	2.72"	1.91"	1"	0.85"	6	0.36	58146
SSHR-12-13-34-125-AC	AK58008	1,250	1/2" - 13	0.92"	2.46"	1.23"	3/4"	0.78"	4.93"	3.66"	1.98"	1.45"	14	2.50	58048
SSHR-12-13-114-125-AC	AK58012	1,250	1/2" - 13	0.92"	2.46"	1.23"	3/4"	1.28"	4.93"	3.66"	1.98"	1.45"	14	2.50	58052
SSHR-58-11-34-2-AC	AK58002	2,000	5/8" - 11	0.92"	2.33"	1.23"	3/4"	0.78"	4.93"	3.66"	1.98"	1.45"	30	2.6	58056
SSHR-58-11-114-2-AC	AK58006	2,000	5/8" - 11	0.92"	2.33"	1.23"	3/4"	1.28"	4.93"	3.66"	1.98"	1.45"	30	2.6	58046
SSHR-34-10-1-25-AC	AK58014	2,500	3/4" - 10	0.92"	2.21"	1.23"	3/4"	1.03"	4.93"	3.66"	1.98"	1.45"	50	2.70	58054
SSHR-34-10-112-25-AC	AK58018	2,500	3/4" - 10	0.92"	2.21"	1.23"	3/4"	1.53"	4.93"	3.66"	1.98"	1.45"	50	2.70	58058
SSHR-78-9-1-4-AC	AK58202	4,000	7/8" - 9	1.41"	3.02"	1.71"	1"	1.04"	6.60"	5.16"	2.99"	2.20"	80	7	58242
SSHR-78-9-114-4-AC	AK58203	4,000	7/8" - 9	1.41"	3.02"	1.71"	1"	1.29"	6.60"	5.16"	2.99"	2.20"	80	7	58243
SSHR-1-8-114-5-AC	AK58210	5,000	1" - 8	1.41"	2.89"	1.71"	1"	1.29"	6.60"	5.16"	2.99"	2.20"	115	7.5	58250
SSHR-34-10-1-35-AC	AK58658	3,500	3/4" - 10	1.41"	4.73"	1.71"	1"	1.04"	8.19"	5.16"	3"	2.2"	50	7.50	58244
SSHR-34-10-112-35-AC	AK58660	3,500	3/4" - 10	1.41"	4.73"	1.71"	1"	1.54"	8.19"	5.16"	3"	2.2"	50	7.50	58246