
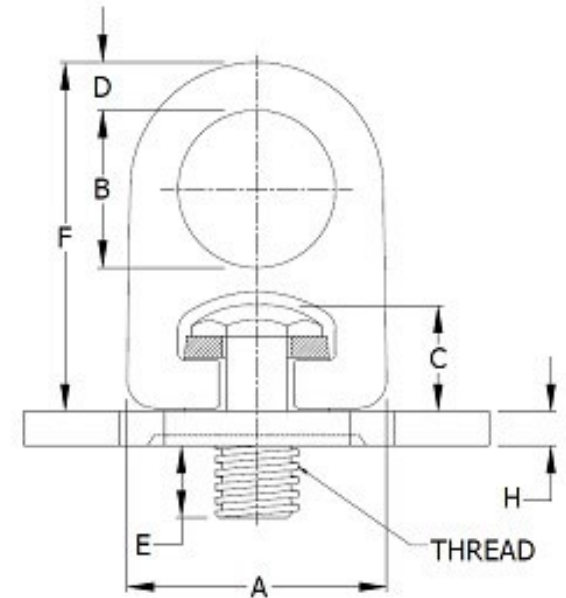


- Swivel 360°
- Pivot Angle 180°
- Safety Factor: 5:1
- Material: Alloy Steel
- Finish: Black Oxide
- 200% Proof-Load Tested with Serial Number for Traceability
- Magnetic Particle Inspected
- Certified Heat Treatment
- Rated 100% From 0° - 90°

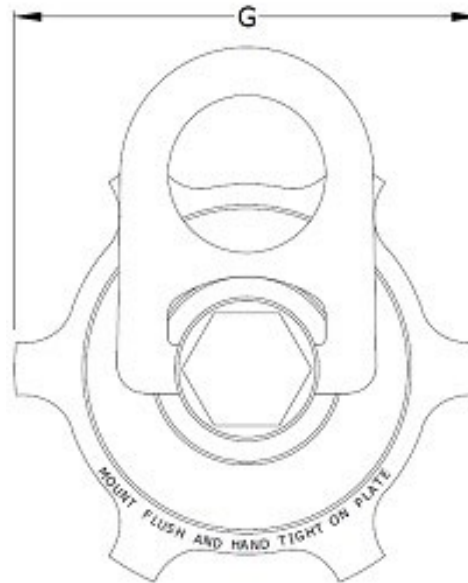

SKU	VENDOR#	RATED LOAD (lbs)	THREAD TYPE	THREAD SIZE	A	B	C	D	E	F	H	G	WEIGHT (lbs)
SPHR-34-45-34-5-AC	AK38005	5,000	COIL	3/4"	4.05"	2.40"	1.97"	3/4"	3/4"	5.60"	.50"	5"	6
SPHR-1-35-1-5-AC	AK38015	5,000	COIL	1"	4.05"	2.40"	1.97"	3/4"	1"	5.60"	.50"	5"	6
SPHR-1-14-1-10-AC	AK38215	10,000	COIL	1-1/4"	5.40"	3.20"	2.62"	1"	1"	7.48"	.70"	7"	14.5
SPHR-1-12-112-10-AC	AK38225	10,000	COIL	1-1/2"	5.40"	3.20"	2.62"	1"	1 1/2"	7.48"	.70"	7"	14.5
SPHR-1-14-1-15-AC	AK38865	15,000	COIL	1-1/4"	6.75"	4.00"	3.28"	1-1/4"	1"	9.35"	.67"	9"	26
SPHR-1-12-112-15-AC	AK38875	15,000	COIL	1-1/2"	6.75"	4.00"	3.28"	1-1/4"	1-1/2"	9.35"	.67"	9"	26