


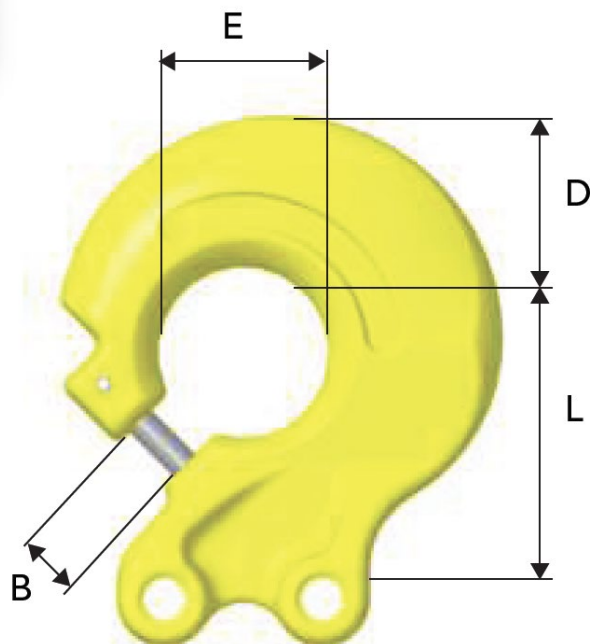

VENDOR#	CODE	WLL (LBS)	DIMENSIONS IN INCHES				WEIGHT (LBS)
			L	B	E	D	
B14740	CLD-6-10	5,700	1.69	0.43	0.94	0.87	0.88
B14741U	CLD-8-10	9,918	2.28	0.47	1.26	1.14	1.32
B14742U	CLD-10-10	15,317	2.91	0.59	1.57	1.46	2.65
B14743U	CLD-13-10	26,007	3.70	0.71	2.05	1.81	6.83
B14744U	CLD-16-10	39,231	4.69	0.98	2.52	2.24	12.13

- For use with Grade 80 or 100 chain and master links.
- 4:1 Design Factor. Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M and AS 3776:2015.
- Note: The maximum in service temperature is 392°F.