


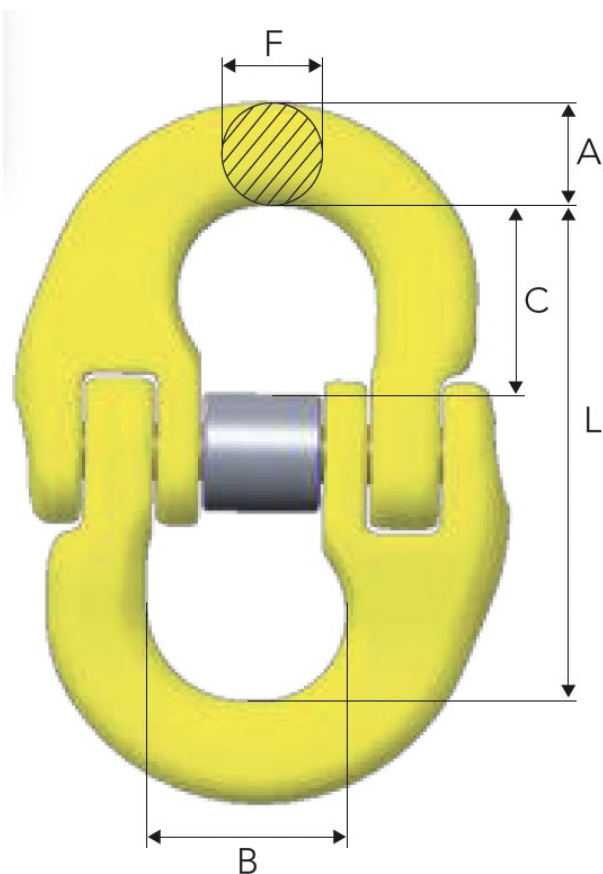

VENDOR#	CODE	WLL (LBS)	DIMENSIONS IN INCHES					WEIGHT (LBS)
			L	B	F	A	C	
Z100821	G-6-10	3,306	1.77	0.59	0.28	0.31	0.63	0.22
Z101358	G-7-10	4,500	2.20	0.71	0.35	0.43	0.87	0.44
Z100822	G-8-10	5,700	2.20	0.71	0.35	0.43	0.87	0.44
Z100823	G-10-10	8,800	2.68	0.98	0.47	0.51	1.02	0.66
Z100824	G-13-10	15,000	3.50	1.14	0.59	0.67	1.30	1.54
Z100825	G-16-10	22,600	4.17	1.42	0.75	0.79	1.57	3.09
Z101119	G-20-10	35,300	4.92	1.69	0.91	1.02	1.73	4.85
Z101339	G-22-10	44,080	5.98	1.97	1.02	1.10	2.32	7.72
Z101365	G-26-10	60,169	6.34	2.28	1.26	1.34	2.40	12.57
Z101666	G-32-10	88,160	7.87	2.76	1.50	1.57	3.03	20.94

- For use with Grade 80 or 100 chain and master link and eye hook.
- 4:1 Design Factor. Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M-02 and AS 3776:2015.