


## HS/S / Eye Sling Hook

This eye sling hook offers universal options for usage and is manufactured with a forged safety latch that locks into the tip of the hook, thereby offering increased protection against lateral shifts. The hook is suitable for Connex and welded systems.

Please note that the product is suitable for **straight pull only**. Loads must not be placed on the tip of the hook or the safety latch!

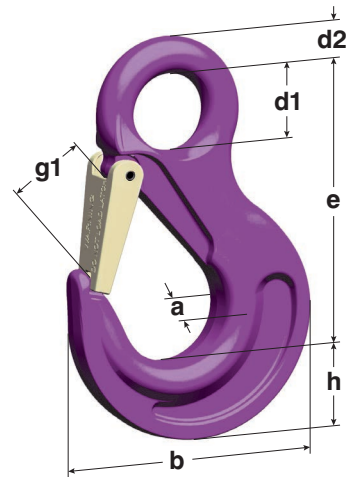

Code	Chain Size	WLL (lb)	e (inch)	h (inch)	a (inch)	d1 (inch)	d2 (inch)	g1 (inch)	b (inch)	Weight (lbs/pc)	Quantity per package
HS/S 7/8	9/32" - 5/16"	5,700	4.17	1.06	0.75	0.98	0.43	1.02	3.46	1.25	12
HS/S 10	3/8"	8,800	5.16	1.30	1.02	1.34	0.63	1.22	4.29	2.75	12
HS/S 13	1/2"	15,000	6.47	1.73	1.30	1.69	0.75	1.54	5.28	4.09	6
HS/S 16	5/8"	22,600	7.20	1.97	1.57	1.97	0.98	1.77	6.10	8.49	4
HS/S 19/20	3/4"	35,300	8.07	2.17	1.89	2.17	1.06	2.09	7.01	13.22	2