


HSB/S / Eye Safety Hook

Safe by name, safe by nature – this hook closes and locks automatically, which means that it cannot open when under load. It is perfect in combination with the Connex system and also offers additional, universal connection options thanks to the flattened section on the eye. As it comes with a wider jaw opening than HS/S, it may be used much more flexibly.

Please note that this hook is suitable for straight pull only. The tip of the hook and the safety latch must not be placed under load and the hook should not be used in the welded system.

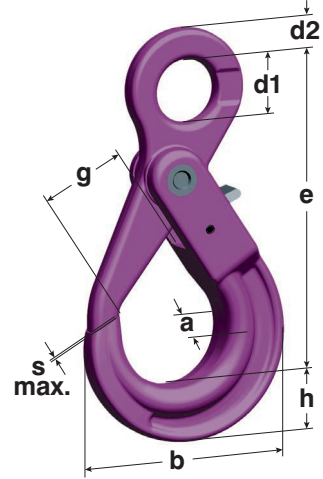

Code	Chain Size	WLL (lb)	e (inch)	h (inch)	a (inch)	b (inch)	d1 (inch)	d2 (inch)	g (inch)	s max. (inch)	Weight (lbs/pc)	Quantity per package
HSB/S 7/8	9/32" - 5/16"	5,700	5.35	1.02	0.79	3.46	0.98	0.47	1.34	0.04	2.02	12
HSB/S 10	3/8"	8,800	6.65	1.18	1.14	4.21	1.38	0.59	1.77	0.04	3.45	8
HSB/S 13	1/2"	15,000	8.07	1.57	1.38	5.43	1.57	0.79	2.05	0.06	7.02	4
HSB/S 16	5/8"	22,600	9.88	1.97	1.61	6.61	1.97	1.06	2.36	0.08	13.73	2
HSB/S 19/20	3/4"	35,300	11.41	2.44	1.97	7.64	2.36	1.18	2.76	0.08	21.45	2