


# HSWP / Eye Sling Hook

For general lifting applications. All hooks have a forged and galvanized safety latch that provides excellent protection against lateral shifts.

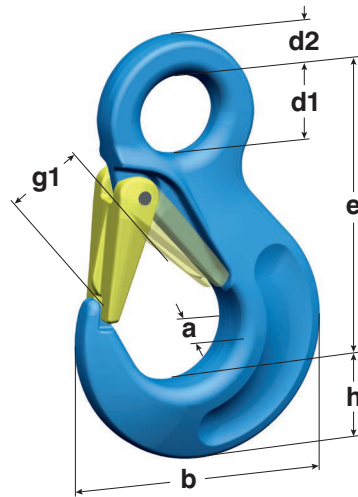

Code	Size	WLL (lb)	e (inch)	h (inch)	a (inch)	d1 (inch)	d2 (inch)	g1 (inch)	b (inch)	Weight (lbs/pc)
HSWP 7/8 (Formerly HS720/820)	9/32" - 5/16"	6,600	4.17	1.06	0.75	0.98	0.43	1.02	3.46	1.43
HSWP 10 (Formerly HS1020)	3/8"	10,600	5.16	1.30	1.02	1.34	0.63	1.22	4.25	2.84
HSWP 13 (Formerly HS1320)	1/2"	17,900	6.46	1.69	1.30	1.69	0.75	1.54	5.20	5.36