

# FHX-V



User-friendly horizontal clamp with torsion spring that ensures the clamp will stay in position after it has been set in place

## Application:

- For horizontal lifting and transporting of steel plates and other non-deflecting materials
- **Terrier FHX-V lifting clamps must always be used in pairs (or multiples thereof)**
- Jaw openings available from: 0 to 2.36 in.
- Working load limit (WLL) 2,200 - 13,200 lbs

## Features and Benefits:

- Pre-tensioned spring cam feature for easy single operator usage
- Clamp can be closed and fixed on any desired spot
- Compact and lightweight design for easy handling
- Tough quality heavy-duty welded body
- Maintenance-friendly. Easy to exchange parts are available upon request

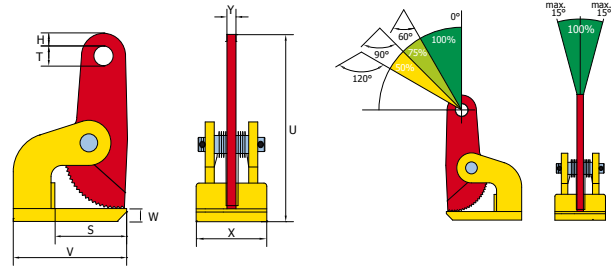

**Terrier FHX-V lifting clamps must always be used in pairs (or multiples thereof)**

Reference No.	Type	Capacity/WLL		Jaw opening (R) (inches)	Dimensions in inches								Weight (lb/pc)
		(lb/pc)	(lb/pair)		V	S	W	T	H	U	X	Y	
953101	1 FHX-V	1,100	2,200	0 - 1.37	5.51	3.90	0.39	1.04	0.47	7.40	3.35	0.59	7
953201	2 FHX-V	2,200	4,400	0 - 2.36	7.09	4.49	0.59	1.20	0.75	11.26	4.92	0.63	18
953301	3 FHX-V	3,300	6,600	0 - 2.36	7.87	4.92	0.79	1.20	0.75	11.89	5.51	0.79	27
953401	4 FHX-V	4,400	8,800	0 - 2.36	8.66	5.47	1.18	1.20	0.75	12.44	6.50	0.79	38
953601	6 FHX-V	6,600	13,200	0 - 2.36	8.66	5.47	1.18	1.20	0.75	12.44	6.50	0.79	38