

# TBLC

Non-marking vertical lifting of materials with parallel sides without minimum WLL


### Application:

- For vertical lifting and transporting of all plates, blocks, and structures with parallel sides without marking, scratching, and/or damaging the material surface
- Perfect for lifting materials such as (stainless) steel, aluminum, natural stone, composite, painted materials, wood, glass, plastic, etc.
- The clamp is locked in the open position. To lift, the operator must activate the handle and hold it up while the lifting eye moves up. This will result in the clamp closing. When laying down the load, the clamp automatically locks itself open
- Jaw openings available from: 1.18 to 19.68 in.
- Working load limit (WLL) 1,100 - 6,600 lbs
- **No min. WLL**



### Features and Benefits:

- 2 special synthetic anti-friction pads to guarantee non-marking
- Lightweight design and easy to use
- Tough quality heavy-duty body
- Maintenance-friendly. Easy to exchange parts are available upon request
- Can be used on polished surfaces as long as there is NO oil on surface

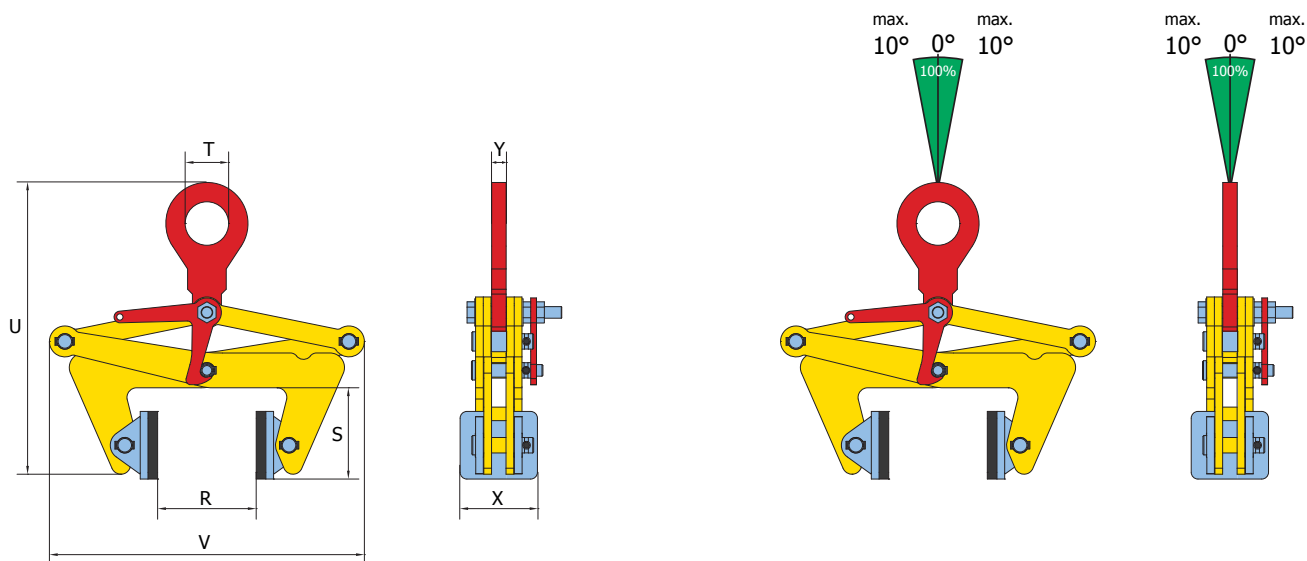

Reference No.	Type	Capacity/WLL (lb/pc)	Jaw opening (R) (inches)	Dimensions in inches						Weight (lb/pc)
				V min-max	U min-max	S	T	X	Y	
801005	0.5 TBLC	1,100	1.18 - 4.33	10.63 - 12.79	12.00 - 18.11	3.74	1.77	3.15 x 2.75	0.59	16
801010	1 TBLC	2,200	3.93 - 9.05	16.73 - 20.87	14.96 - 25.79	4.72	1.77	3.15 x 2.75	0.59	28
801020	2 TBLC	4,400	8.66 - 14.17	22.83 - 26.57	16.14 - 28.93	5.51	1.77	3.15 x 2.75	0.59	40
801030	3 TBLC	6,600	13.77 - 19.68	28.54 - 32.87	20.87 - 35.43	7.01	2.52	3.93 x 3.54	0.63	73