

# TJP / TJPU

Designed for (thin) sheet metal lifting without minimum WLL


### Application:

- For vertical lifting and transporting of (thin) sheet metal
- Jaw openings available from: 0 to .78 in.
- Working load limit (WLL) 551 - 2,200 lbs
- **No min. WLL**





**Note:** Surface hardness of the material lifted must not exceed 37 HRC/345 Hb

### Features and Benefits:


- Equipped with a special pivot which will adapt itself to the load of the clamp generating extra friction, eliminating the chance of slipping loads
- TJPU features an articulated lifting shackle for universal lifting flexibility at various angles
- TJP features a standard lifting shackle
- Always equipped with a safety mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered
- The clamp is locked in closed as well as in open position
- Lightweight design for easy handling
- Tough quality heavy-duty welded shell body
- Maintenance-friendly. Easy to exchange parts are available upon request



Special pivot

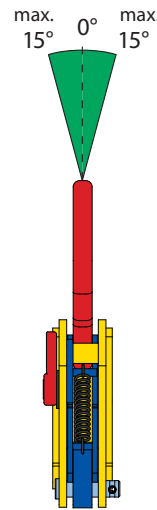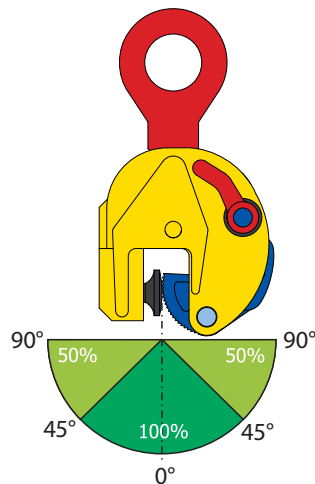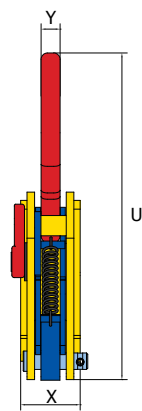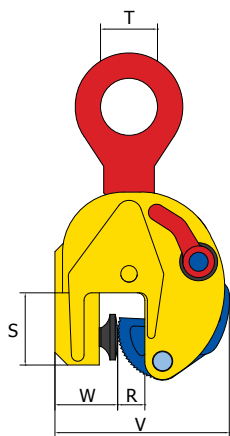

TJP

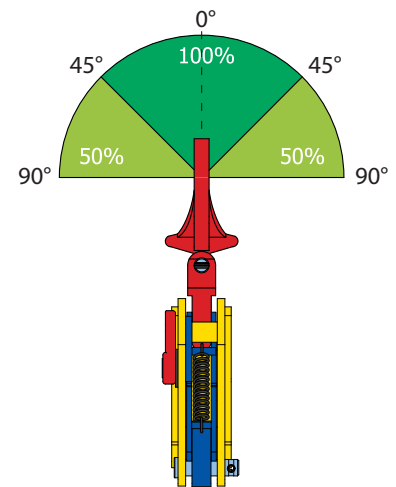

TJPU

Reference No.	Type	Capacity/WLL (lb/pc)	Jaw opening (R) (inches)	Dimensions in inches							Weight (lb/pc)
				S	T	U	V	W	X	Y	
870700	0.25 TJP	551	0 - 0.51	2.13	1.18	7.95	4.45	1.97	1.46	0.39	4
870710	0.25 TJPU	551	0 - 0.51	2.13	1.18	7.95	4.45	1.97	1.46	0.39	5
870800	1 TJP	2,200	0 - 0.78	2.20	1.77	10.24	5.39	1.89	1.77	0.59	9