

TSHPU

Lightweight Holland Profile (HP) clamp for universal lifting


Application:

- For vertical lifting, handling, and transporting of Holland Profile (HP) shipbuilding structures from all positions
- Jaw openings available from: 0 to 1.77 in.
- Working load limit (WLL) 6,600 – 11,000 lbs
- Higher WLL available upon request. Min. WLL is 10% of max. WLL
- Lifting of longer sections should be done with a spreader beam

Note: Surface hardness of the material lifted must not exceed 37 HRC/345 Hb

Features and Benefits:

- Articulated lifting shackle for universal lifting flexibility at various angles
- The articulated lifting shackle guarantees a pressure grip in every position, even when side loading up to 90 degrees. Note a lower load capacity when lifting at an angle higher than 45 degrees. Please check WLL illustrations below
- Standard with 2 pivots for extra powerful clamping force
- Always equipped with a safety mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered
- Clamp is locked in closed as well as open position
- Lightweight design for easy handling
- Tough quality heavy-duty welded shell body
- Maintenance-friendly. Easy to exchange parts are available upon request

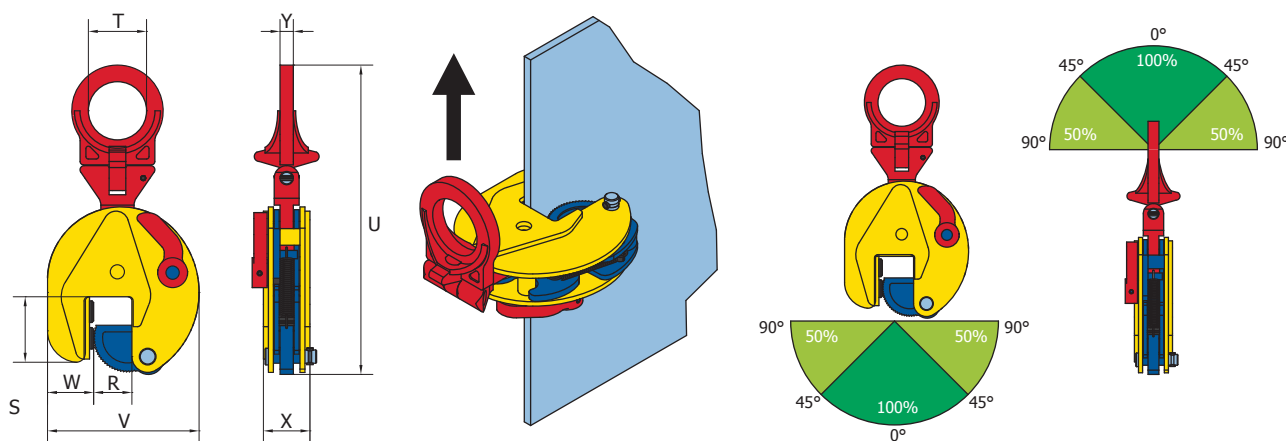

Reference No.	Type	Capacity/WLL (lb/pc)	Jaw opening (R) (inches)	Dimensions in inches							Weight (lb/pc)
				S	T	U	V	W	X	Y	
860300	3 TSHPU	6,600	0 - 1.37	3.66	2.76	14.53	7.17	2.28	2.13	0.63	18
860500	5 TSHPU	11,000	0 - 1.77	4.33	2.76	17.09	8.98	2.28	3.39	0.79	39