


Dura-Lite™ Model 430

Composite Spreader Beam

Get all the benefits of a Model 30 in a lighter weight beam that brings a host of advantages! Composite construction so you can use it in extreme environments. Lighter weight to make lifting, transporting and staging easier on operators. Lift heavier because your beam weighs less.

Product Features:

- Lightweight
- Non-conductive
- Corrosion resistant
- Complies with ASME B30.20, design category B, service class 4
- Proof tested with certificate issued
- DURA-LITE™ product is compliant with European Community standards CE

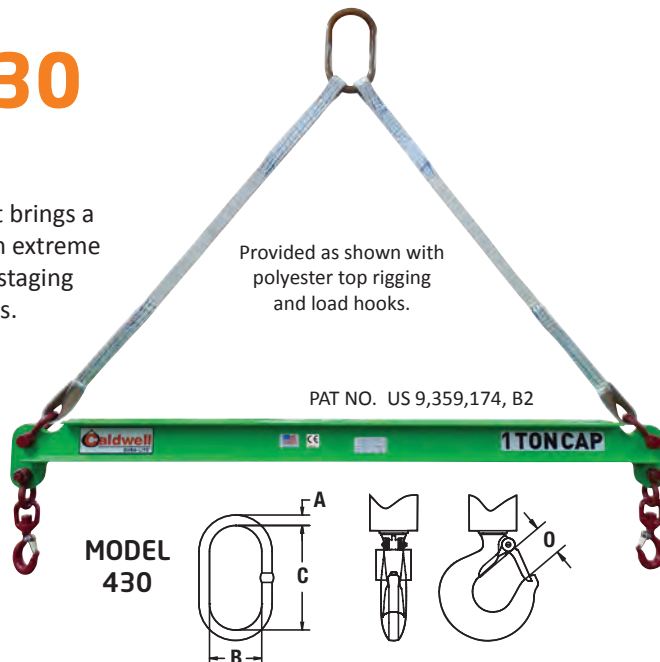

Capacity Metric Tons (Kg.)"	Model Number	Spread		Headroom		Beam Only Weight		Weight With Hardware		Bail Dimension Inches (mm)			Hook
		Inches	Meters	Inches	Meters	Pounds	Kilograms	Pounds	Kilograms	A	B	C	
1/4 (250)	430-1/4-2	24	0.6	24	0.6	5	2.3	9	4.1	0.62 (16)	2.8 (71)	5 (127)	0.89 (22)
	430-1/4-3	36	0.9	30	0.8	7	3.2	11	5.0				
	430-1/4-4	48	1.2	36	0.9	9	4.1	13	5.9				
	430-1/4-6	72	1.8	48	1.2	14	6.4	17	7.7				
	430-1/4-8	96	2.4	60	1.5	18	8.2	22	10.0				
	430-1/4-10	120	3.0	72	1.8	22	10.0	26	11.8				
	430-1/4-12	144	3.7	85.5	2.2	42	19.1	46	20.9				
	430-1/4-14	168	4.3	98.5	2.5	91	29.0	95	31.3				
	430-1/4-16	192	4.9	110.5	2.8	104	33.1	108	35.4				
	430-1/4-18	216	5.5	122.5	3.1	117	37.6	121	39.5				
430-1/4-20	240	6.1	134.5	3.4	132	59.9	137	62.1					
1/2 (500)	430-1/2-2	24	0.6	24.5	0.6	5	2.3	9	4.1	0.62 (16)	2.8 (71)	5 (127)	0.89 (22)
	430-1/2-3	36	0.9	30.5	0.8	7	3.2	11	5.0				
	430-1/2-4	48	1.2	36.5	0.9	10	4.5	14	6.4				
	430-1/2-6	72	1.8	48.5	1.2	14	6.4	18	8.2				
	430-1/2-8	96	2.4	62	1.6	29	13.2	34	15.4				
	430-1/2-10	120	3.0	75	1.9	66	21.3	70	23.1				
	430-1/2-12	144	3.7	87	2.2	80	25.9	84	28.1				
	430-1/2-14	168	4.3	99	2.5	93	42.2	98	44.5				
430-1/2-16	192	4.9	111	2.8	107	48.5	112	50.8					
1 (1000)	430-1-2	24	0.6	25	0.6	6	2.7	13	5.9	0.62 (16)	2.8 (71)	5 (127)	0.89 (22)
	430-1-3	36	0.9	31	0.8	9	4.1	15	6.8				
	430-1-4	48	1.2	37	0.9	11	5.0	18	8.2				
	430-1-6	72	1.8	51	1.3	25	11.3	32	14.5				
	430-1-8	96	2.4	64	1.6	56	20.0	63	23.1				
	430-1-10	120	3.0	76	1.9	76	34.5	83	37.6				
2 (2000)	430-2-2	24	0.6	27	0.7	11	5.0	22	10.0	0.62 (16)	2.8 (71)	5 (127)	0.91 (23)
	430-2-3	36	0.9	33	0.8	13	5.9	24	10.9				
	430-2-4	48	1.2	40	1.0	21	9.5	32	14.5				
	430-2-6	72	1.8	53	1.3	43	15.4	56	20.9				
	430-2-8	96	2.4	65	1.7	63	28.6	76	34.5				
3 (3000)	430-3-2	24	0.6	27	0.7	11	5.0	24	10.9	0.62 (16)	2.8 (71)	5 (127)	1 (25)
	430-3-3	36	0.9	33	0.8	13	5.9	27	12.2				
	430-3-4	48	1.2	42	1.1	31	11.3	45	18.1				
	430-3-6	72	1.8	54	1.4	49	22.2	64	29.0				

Free standard UPS ground shipping on all "standard" Dura-Lite™ catalog beams up to 96" length/spread.