


T/S / Enlarged Master Link

T/S Enlarged Master Link is ideal for the simple, speedy assembly of single and double leg chains using Connex connecting elements, as a master link in welded systems and as an end link. Its inner dimensions are larger than those of the A/S MasLink, making it suitable for larger crane hooks or special hooks.

The T/S Enlarged Master Link must not be used for Quad Leg chains, except when combined with B/S Transition Links in GT/S Quad Leg assemblies.

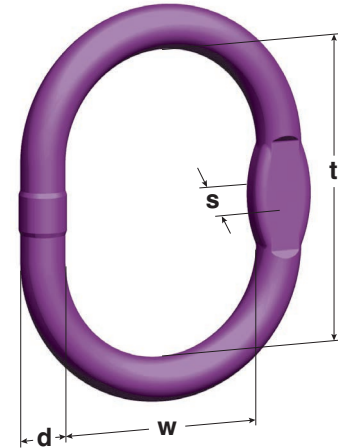

Code	Single leg sling	Double leg sling	WLL (90° - 45°) (lb)	WLL (45° - 30°) (lb)	Fits on single hook DIN 15401	Fits on double hook DIN 15402	d (inch)	t (inch)	w (inch)	s (inch)	Weight (lbs/pc)	Quantity per package
T/S 13	9/32"	7/32"	6,100	4,300	4	5	0.55	4.72	2.76	0.39	0.97	12
T/S 16	5/16"	9/32"	8,400	6,000	5	6	0.63	5.51	3.15	0.51	1.56	12
T/S 18	3/8"	5/16"	12,800	9,100	6	8	0.75	6.30	3.74	0.55	2.40	10
T/S 22	1/2"	3/8"	18,500	13,200	10	12	0.91	6.69	4.13	0.67	3.83	4
T/S 26	5/8"	1/2"	30,000	21,400	10	12	1.06	7.48	4.33	0.79	5.83	4
T/S 32	3/4"	5/8"	45,000	32,100	12	16	1.30	9.06	5.12	1.02	10.52	1
T/S 36	7/8"	3/4"	61,100	43,600	20	25	1.50	10.83	5.90	1.14	16.46	1