



S-1316

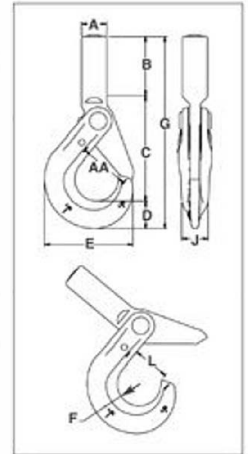

- All SHUR-LOC[®] hooks have the following features:
 - Forged alloy steel, Quenched & Tempered.
 - Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
 - Easy to operate with enlarged thumb access.
 - Positive lock latch is self-locking when the hook is loaded.
 - The SHUR-LOC[®] hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
 - Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
 - Contact Engineered Solutions for additional threading or Split-Nut options at thecrosbygroup.com/engineeredolutions.
- Eye Style incorporates these added features:
 - Individually Proof Tested to 2-1/2 times the chain Working Load Limit with certification.
 - S-1316 meets the performance requirements of EN1677-3.
 - Suitable for use with Grade 100 and Grade 80 chain.
 - Designed with 'engineered flat' to connect to S-1325 chain coupler.

S-1318A

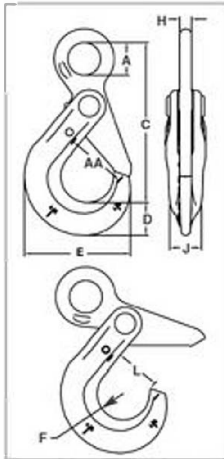

Crosby 8/10™ Fatigue Resistant QT CE

APPLICATION AND WARNING INFORMATION SECTION 17

S-1316 SHUR-LOC[®] Eye Hook with Positive Locking Latch

Chain Size		Stock No.	Frame code	Grade 100 Alloy Chain Working Load Limit (lb) 4:1	Working Load Limit (lb) 5:1	Weight Each (lb)	Dimensions (in)								
(in)	(mm)						A	C	D	E	F	H	J	L	AA*
-	6	1022896	D	3200	2560	.85	.78	3.95	.79	2.60	.67	.31	.63	1.14	1.50
1/4-5/16	7-8	1022914	G	5700	4560	1.80	1.08	5.31	1.10	3.50	.87	.39	.81	1.48	2.00
3/8	10	1022923	H	8800	7040	3.40	1.30	6.57	1.17	4.39	1.10	.51	.94	1.83	2.50
1/2	13	1022932	I	15000	12000	6.00	1.65	8.23	1.67	5.45	1.26	.67	1.16	2.22	3.00
5/8	16	1022941	J	22600	18000	15.1	2.20	10.06	2.04	6.56	1.50	.87	1.50	2.65	3.50
3/4	18-20	1022952	-	35300	28240	19.0	2.60	10.77	2.22	7.76	2.01	.87	2.03	3.52	5.00
7/8	22	1022943	-	42700	34160	28.0	2.87	12.49	2.45	8.75	2.27	.98	2.20	3.83	6.00
1	26	1022944	-	59700	47760	49.5	3.15	14.60	3.21	9.87	2.46	1.26	2.68	4.09	6.50

*Deformation indicators.