



# GRADE 70 CM® DOMESTIC TRANSPORT CHAIN SPECIFICATIONS

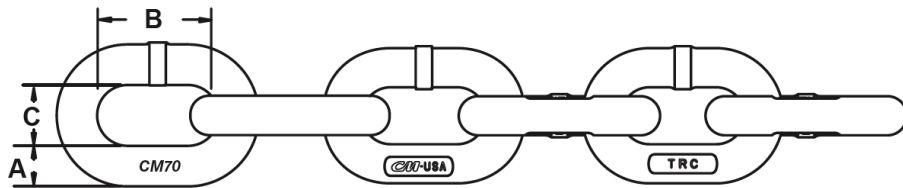

PART NUMBER	CHAIN SIZE	WLL (LBS)	LENGTH	A	B	C	WEIGHT (LBS)
TC5161070-D	5/16"	4,700	10'	0.33	1.10	0.50	9.7
TC5161670-D	5/16"	4,700	16'	0.33	1.10	0.50	15.6
TC5162070-D	5/16"	4,700	20'	0.33	1.10	0.50	20.4
TC5162570-D	5/16"	4,700	25'	0.33	1.10	0.50	25.3
TC381070-D	3/8"	6,600	10'	0.39	1.38	0.60	13.7
TC381670-D	3/8"	6,600	16'	0.39	1.38	0.60	23.8
TC382070-D	3/8"	6,600	20'	0.39	1.38	0.60	31.16
TC382570-D	3/8"	6,600	25'	0.39	1.38	0.60	36.3
TC121070-D	1/2"	11,300	10'	0.52	1.56	0.73	27
TC121670-D	1/2"	11,300	16'	0.52	1.56	0.73	43.2
TC122070-D	1/2"	11,300	20'	0.52	1.56	0.73	56.93
TC122570-D	1/2"	11,300	25'	0.52	1.56	0.73	67.5

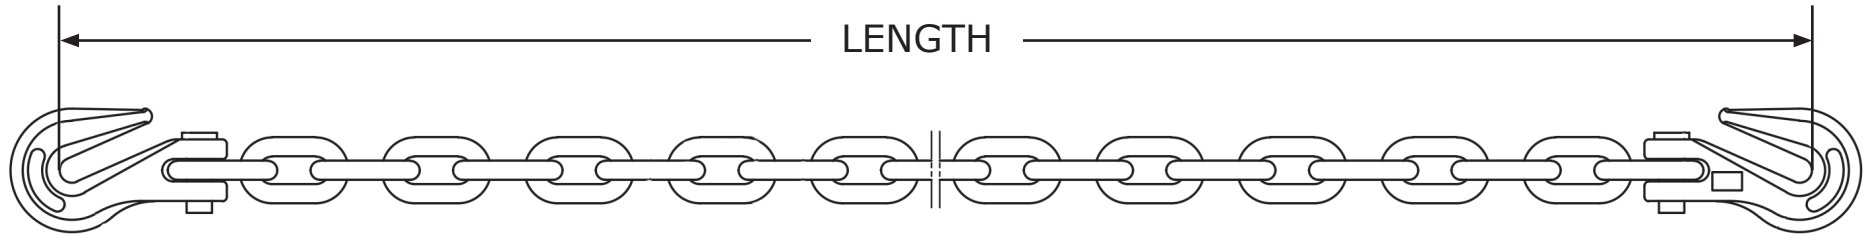

- Do not use for overhead lifting.
- High-carbon steel, heat treated.
- Zinc plated with gold chromate finish.
- Meets ASTM & NACM standards.
- Meets FMCSA & CVSA requirements.
- Thermal heat treated using advanced technology.
- Heat treated for superior wear and toughness.
- 100% proof tested.
- Permanent identification on chain (embossed with G70, plus 3 letter trace code).
- Full weld trim.
- Design factor 4:1.