




OBLONG MASTER LINKS

V10™ Alloy Oblong Master Links (Grade 100)

Stock #	Mfr. #	Trade Size		Matching G100 Chain Size (Inches)		Dimensions (Inches)			Lbs. Per Each	Working Load Limit (Lbs.)*
		Inches	MM	1 leg	2 Legs	A	B	C		
8451000	D13	1/2	13	9/32	1/4	0.51	2.36	4.33	0.8	5,300
8451100	D16	5/8	16	5/16	9/32	0.63	2.36	4.33	1.2	7,400
8451200	D18	3/4	18	3/8	5/16	0.75	2.95	5.31	2.0	11,200
8451300	D22	7/8	22	1/2	3/8	0.91	3.54	6.30	3.5	15,200
8451400	D26	1	26	5/8	1/2	1.06	3.94	7.09	5.5	26,400
8451500	D32	1-1/4	32	3/4	5/8	1.30	4.33	7.87	9.3	39,700
8451600	D38	1-1/2	38	7/8	3/4	1.50	5.91	10.83	16.5	61,100
8451700	D45	1-3/4	45	1	7/8	1.77	7.09	13.39	28.3	79,300
8451800	D50	2	50	---	1	1.97	7.48	13.78	36.4	103,600
8451900	D60	2-3/8	60	---	---	2.20	7.87	15.75	51.4	132,200

*Working Load Limit (WLL) of the oblong master link only, for WLL of chain slings please refer to page 7.

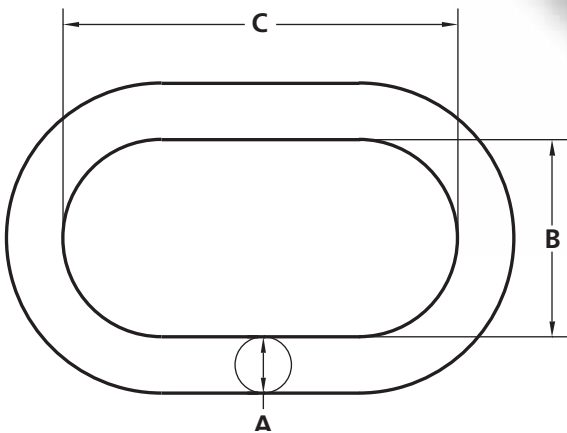

DO NOT EXCEED CAPACITY!
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.